
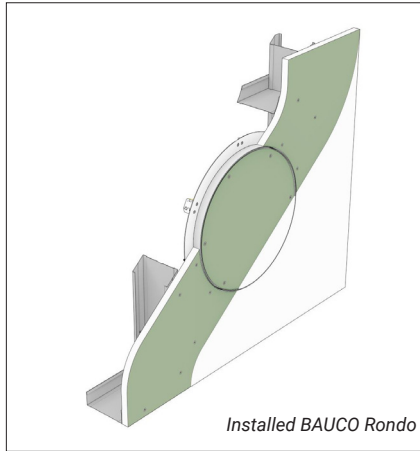


# BAUCO Rondo

Circular Drywall Access Panel with rear-mount frame

## PRODUCT INFORMATION

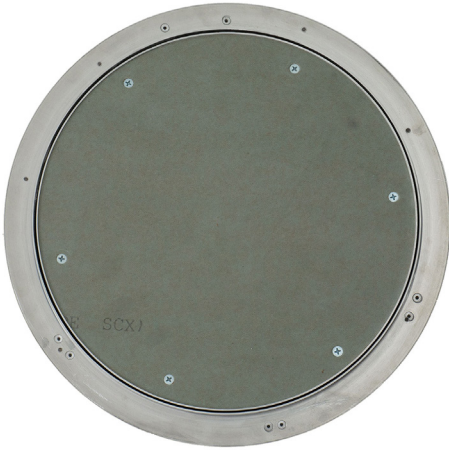

### APPLICATIONS

- Access openings in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall ceilings
- Cleanest finish possible required
- Three standard sizes and latch and inlay options
- Wide variety of surface finishes such as paint, wallpaper or facing materials such as tile and millwork (by others)
- Beneficial in designs with curvilinear elements
- Non-fire rated assemblies

### DESCRIPTION

- Rear-mount frame
- Concealed frame, hardware and latch
- Factory installed drywall inlay
- Frame acts as finishing bead
- Virtually invisible finishing
- 1/16" perimeter gap
- Fully removable door leaf
- Free-pivot hinge and safety cable

### SPECIFICATIONS

**Frame:** 6063-T6 aluminum frame with galvanized steel hardware

**Door leaf:** 6063-T6 aluminum frame and moisture and mold resistant drywall inlay

**Latch:** Concealed mechanical touch latch

**Hinge:** 16 gauge galvanized steel free pivot hinge

**Gasket:** Closed cell foam perimeter gasket

#### Standard Latch

- Mechanical touch latch

#### Latch Options

- Keyed lock
- Cam latch (slotted or torx head)

#### Standard Finish

- Unfinished
- Ready to receive a wide range of surface treatments on site

#### Finish Option




- BAUCO Paint-ready. Factory-primed door leaf. Ready to paint.

#### Standard Inlay

- Moisture and mold resistant drywall

#### Inlay Options

- Acoustic Board (for enhanced STC)
- Tile Backer
- Plaster Board (to bond with plaster veneer)
- Double Layer Drywall
- Plywood

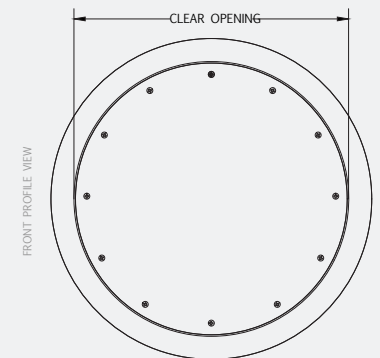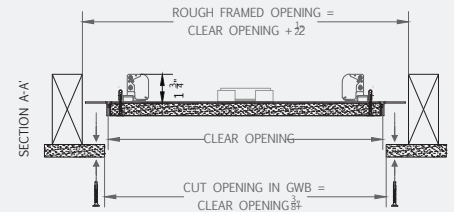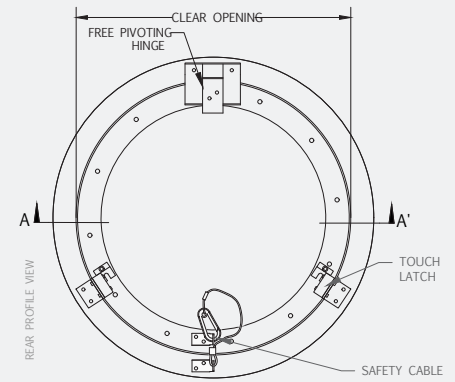

### Standard Sizes

| Access Panel Size<br>Clear Opening |             | Weight |
|------------------------------------|-------------|--------|
| Inch (nominal)                     | mm (actual) | lbs    |
| 12"                                | 300mm       | 3      |
| 16"                                | 400mm       | 5      |
| 24"                                | 600mm       | 12     |

**Cut Opening in Drywall** = Clear OPENING Size + 3/8"

**Rough Framed Opening** = Clear OPENING Size + 2 1/2"

For detail, see submittal sheet.

Available in three sizes 12", 16" and 24" diameter.

**Call or email to connect.**



**BUY DIRECT from BAUCO for best pricing and shortest lead time.** Quotes within 24 hours. Average custom production time = 4 days. Product specialists standing by for consultation and orders.

1.877.592.0033 | info@bauco.com | bauco.com  
834 Devonshire Road, Victoria, BC, Canada V9A 4T4